


ULTRA-ZONE™

Product Catalog 104
Effective 4/1/26

Scan for pricing

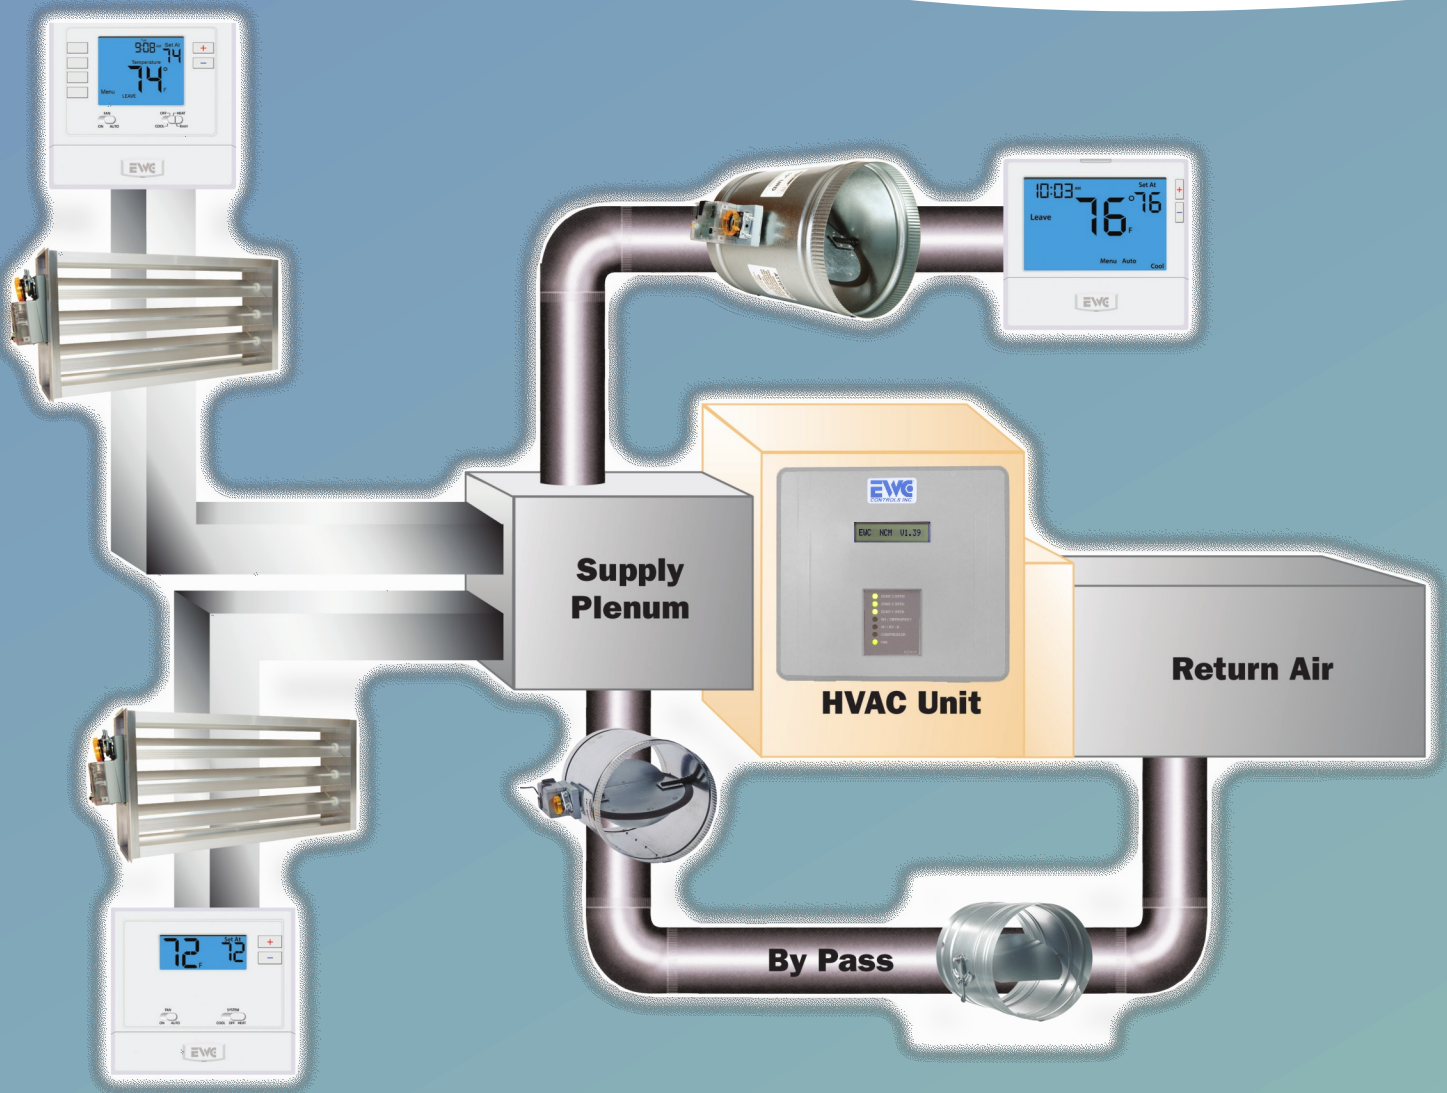

Forced Air Zone Controls

Scan for app



Excellence Without Compromise

EWC
CONTROLS, LLC.

Phone: 800-446-3110 • Fax: 732-446-5362

E-Mail: info@ewcccontrols.com

www.ewcccontrols.com

385 Hwy. 33 Englishtown, NJ 07726

Proudly Manufacturing in the USA

Table of Contents

Who is EWC.....	2
How to order.....	3
The Benefits of Ultra-Zone.....	4
How Ultra-Zone works.....	5
Duct Design.....	6-7
Zone Panels.....	8-10
Zone Dampers.....	11-14
By-Pass Dampers.....	15-16
Restricting Hand Dampers.....	17
Parts and Accessories.....	18
Econet-3.....	18
Alphabetical Product List.....	19
Limited Warranty.....	19

About EWC LLC.

In early 1961, EWC Incorporated was formed as a manufacturing company of power transformers for military and commercial use. Today, EWC Inc., transformers are located on smart guided missile systems, helicopters, airplanes, the space shuttle and many other applications. The successful growth of this business allowed EWC to expand its manufacturing capabilities and enter into the HVAC industry.

Our vast experience in designing and manufacturing military components and power transformers for all applications led us to form EWC Controls in 1988. For 36 years, EWC Controls was the leading manufacturer of Forced Air Zone Controls. In 2024 Research Products Corp acquired EWC to help grow their Healthy Air message. Today, homeowners, wholesalers and contractors continue to rely on our vast expertise and experience to provide the most reliable comfort solutions for all applications.

Eight (8) of the last Nine (9) years, EWC Controls has won the Prestigious Dealer Design Awards by offering top quality, innovative products. The Dealer Design Awards are judged by industry professionals and awarded to Industry setting products. In 2000, EWC introduced the first zone damper with directional LEDs'. 2004 saw EWC introduce the most complete comfort guide and package for wholesalers and contractors.

In 2011, EWC Controls introduced the first Communicating Zone panel built on the ClimateTalk open protocol. This industry setting, cutting edge product is well advanced of any current product offering. Once again, as recognized by our peers, EWC Controls was awarded the Dealer Design Award for this advancement in technology. In 2012 EWC Controls partnered with ACCA to help develop Manual Zr, an ANSI approved residential zoning guide. In 2016 we created the first ever Smart By-Pass.

For decades, EWC has developed and enhanced our product offering for the betterment of the industry. As we continue to grow, all of us at EWC and Research Products look forward in continuing those developments of future comfort solutions and enhancements.



How To Order An Ultra-Zone System

Control Panel

Download our App for convenience



NCM

1 Stage Heat/Cool
2 Stage Heat/ 1 Stage Cool
2-3 zones - NCM-3z
For larger zone systems
See BMPlus series

BMPlus

1 Stage Heat/Cool
3 Stage Heat/2 Stage Cool
2-3 zones (1) BMPlus-3z
4-6 zones (1) BMPlus-6z
7-9 zones (1) BMPlus-9z
For larger zone systems
See UZC series

UZC

1 Stage Heat/Cool
2 Stage Heat/ 2 Stage Cool
3 Stage Heat/ 2 Stage Cool
4 Stage Heat/ 2 Stage Cool
2-4 zones (1) UZC-4
5-6 zones (1) UZC-6
7-8 zones (1) UZC-8
9-10 zones (1) UZC-10
11-12 zones (1) UZC-12
13-14 zones (1) UZC-14
15-16 zones (1) UZC-16
Up to 22 zones,
2 zone increments

Dampers



Round

4"-20" URD (3-wire PO/PC))
4"-20" RSD (2-wire spring return)



Round

(Retrofit)
4"-10" SID (3-wire PO/PC)



Rectangular

(W"xH") ND (3-wire PO/PC)
(W"xH") ND-RSD (2-wire Spring Return)
Motor is always mounted on
2nd dimension

By-Pass Dampers (If Necessary)



Smart By-Pass
8"-20" SBD (Round)
W"xH" SBD (Rectangular)
Any Size (Call Factory)

Electronic (Modulating)
8"-20" EBD (Round)
W"xH" EBD (Rectangular)
Any Size (Call Factory)

Round Barometric
8"-16" CLBD
Rectangular Barometric
W"xH" PRD



DAPC
Page 15

Transformer

40VA for every (15) URD, ND, and SID dampers
40VA for every (5) RSD and ND-RSD dampers

Ultra-Zone controls - benefits

Why Use An Ultra-Zone System?

The Ultra-Zone zone control systems provide personalized comfort of heating and air conditioning equipment for homes and offices.

The Ultra-Zone system utilizes motorized dampers controlled by room thermostats to selectively control the temperature for each zone of the home or building. This is called “zoning”.

We are zoning off areas so that we can allow tighter control of the heating and cooling. This is very similar to the lighting and plumbing systems in a house.

You do not have one main light switch that turns ‘on’ and ‘off’ all the lights in the house, nor do you have one faucet that turns ‘on’ and ‘off’ all of the water in the house. Each system has separate controls for each room and fixture.

The Ultra-Zone system will allow that same degree of control for your heating and cooling.

Total Comfort

The Ultra-Zone system permits personalized comfort of each zone – providing temperature control where you want it when you want it.

Added Convenience

No more running ‘up’ and ‘down’ stairs to control the temperature. We will provide thermostats in each zone.

Energy Savings

Ultra-Zone systems can reduce energy costs by 25-30% or more. By using setback thermostats, you only pay for the heating and cooling when you want it.

Common Sense


The heating and cooling equipment makes up the largest part of the monthly utility bill. Why not control these items the same way you do with your lighting and plumbing?

Why use an ULTRA-ZONE system over TWO units!


Some contractors are installing two heating and cooling units to try and satisfy the comfort needs of homeowners. This is an expensive alternative to an Ultra-Zone system. Two units cost more to install and maintain. One unit and a damper system is far less expensive than the cost of the second furnace. The cost of two units drastically increases when an additional air conditioner is installed. For example, in place of using two 2 ton heating-cooling systems, an Ultra-Zone

system can be used with one 4 ton unit at an average savings of 30-35% of the overall cost. This cost reduction comes from eliminating duplicate work and installations. With one unit, the installation is much faster and the material will cost less. With lower costs to the homeowner and more comfort features as its benefit, the Ultra-Zone system is highly recommended over installing two units.

WINTER CONDITIONS

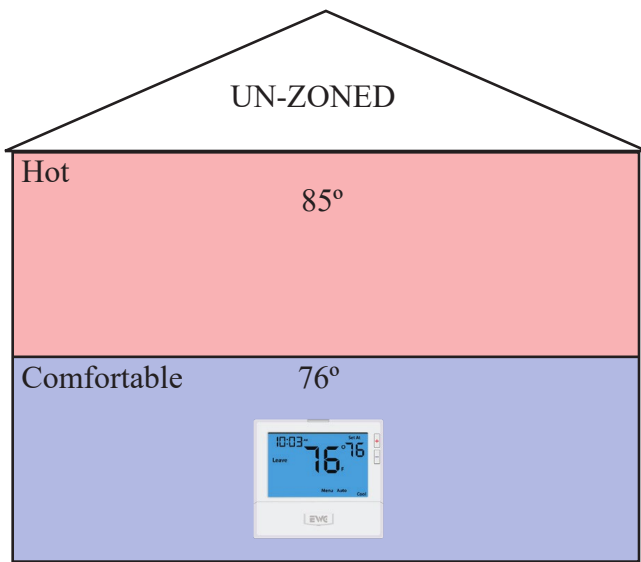

With one thermostat the entire house is one zone, making it difficult to control the comfort level throughout the house.

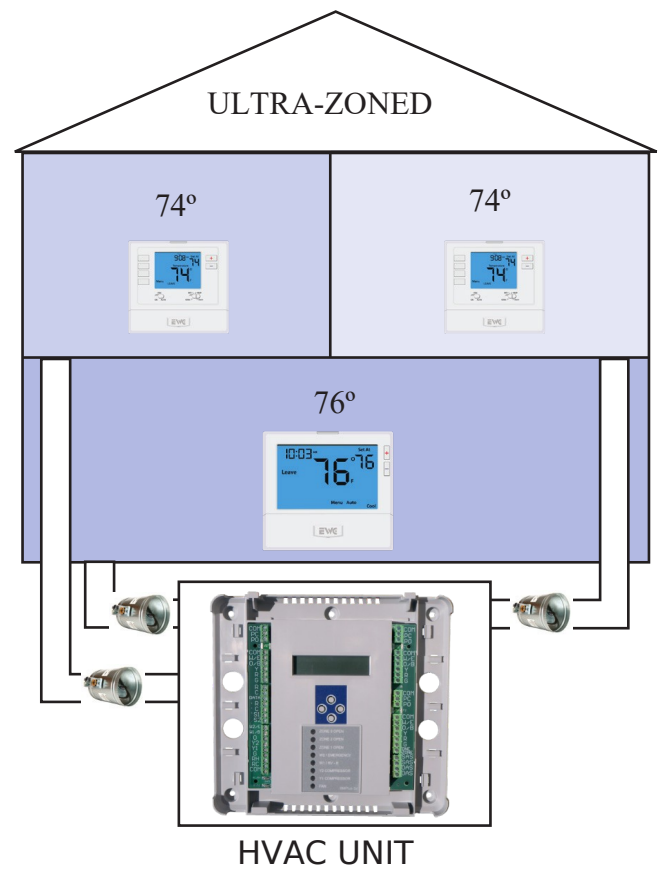

With multiple thermostats (zoning), occupants can maintain their desired temperature set point upstairs and downstairs independently of each other.

How the ULTRA-ZONE System works.

The purpose of the Ultra-Zone system is to provide total comfort in the home and office. Motorized dampers are “opened” or “closed” by thermostats based on the temperature set point of the homeowner. The damper system will control the airflow through the ductwork and deliver ONLY the desired air to the desired location. Each thermostat has the ability to turn on and shut off the heating and cooling. The Ultra-Zone system can accommodate over 20 zones. This means that over 20 thermostats can be installed in a home or building to control the temperature in each zone.

There are very few Ultra-Zone components that are needed to make the zoning system function. The control panel is the “brain” of the system. The zone thermostats allow independent temperature control, and the zone dampers control the airflow to the zone thermostats. A transformer is needed to power the system and occasionally a by-pass damper may be required.

The basic components of an Ultra-Zone system are:

- 1) A Control Panel
- 2) Zone Thermostats
- 3) Zone Dampers
- 4) Dedicated Transformer
- 5) By-pass Damper (If necessary)


Along with some thermostat wire, the above are the only components that are needed to install an Ultra-Zone system. The above diagram shows a typical installation with all of the components needed for a zoning system.

When laying out a duct system for a job that will include an EWC Controls zoning system, many people think that there needs to be drastic changes to accommodate the zoning feature, this is not so. The ducts still need to deliver an adequate amount of CFM to the zoned area as they would if it were not zoned. The square footage of the home or building is not changing. What will change is the amount of square footage that will need to be heated or cooled at the same time. With zoning allowing for setback thermostats and different temperature settings throughout the home or building during the day and night, demand on the heating and cooling equipment should be a lot less due to zoning off areas that will not need to be heated or cooled during certain times of the day.

Since the heating and cooling requirements are now going to be controlled through zones, the concern is the excess pressure, or build up of pressure, from closed zones. What this means is that when some zones are in setback mode, the airflow to those zones will be shut off. The airflow will cause a pressure build up in the duct system which will be dealt with by using a form of "Bypass" to alleviate that pressure build-up. There are several ways of dealing with this excess pressure and what works for one contractor may not work for another, but EWC has some long standing rules that should be followed. These rules are important to follow to ensure proper airflow throughout the system and to ensure proper operation of the EWC Controls zoning system. EWC Controls follows the principles outlined in the ACCA Manual Zr zoning guide.

- When using a "By Pass" back to the Return it is suggested to use a Volume Control Hand Damper. Model # ND-HD or RD-HD in the ByPass Return Run.

Figure 1

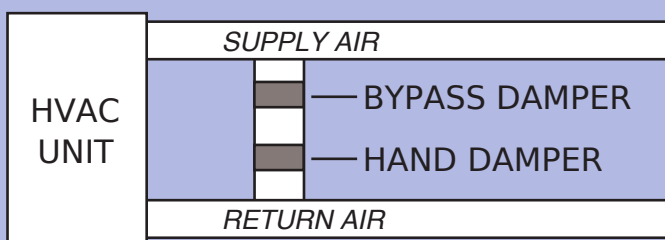


- 100% of the rated CFM must always move through the Air Handler when zoning with Heat Pumps and High cooling demand areas (i.e. Florida).
- Always assume the worst case scenario, which is the smallest zone will be the only one to call at any given time.
- EWC Controls recommends the use of the SBD (Smart Balancing By-pass Damper) on all zoning installations. EWC Controls highly recommends the use of the SBD on all 3 zones or more applications, as well as systems that will exceed 2000 CFM.

As stated previously, there are several ways to accomplish these rules. EWC Controls recommends two types of methods for two different types of applications. The first application (not recommended for high cooling demand areas) is on 2 and some 3 zone jobs when there is no room to install a bypass damper. On these jobs it is possible to oversize the supply ducts to handle the increased pressure of closed zones. For example, oversize each zone supply duct to handle 65%-70% of the CFM. This way when the other zones close, the one calling can handle the pressure safely. The supply ducts should never be oversized more than 20% of their intended capacity. (This method will reduce the velocity of the system so it is important to know your customer's expectations of the system.)

The BEST method for relieving excess pressure in a zoning system is the Bypass damper. This method will take the excess pressure from the supply duct and return it back to the return duct. This is done by tapping into the supply air and running a duct back to the return air and mounting a bypass damper in that run (see below). EWC Controls by-pass dampers are PRD & CLBD (barometric) and the EBD (electronic), and the SBD (Smart Balancing By-Pass Damper).

Figure 2

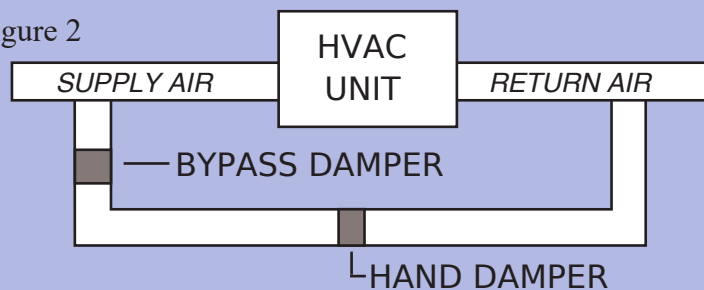

Duct Sizing with Ultra-Zone

When tapping back into the return duct, the tap is recommended to be at least 6 ft away from the equipment. The farther the better. This is done to ensure that the hot or cold air coming off the plenum has time to mix with the return air before going across the coil again. Temperature sensors are mandatory when using the bypass method. The sensors will prevent any damage to the equipment from overheating or coil freeze-up. EWC Controls includes the SAS (Supply Air Sensor) with every Ultra-Zone control panel. The use of a Hand Damper is recommended to be installed in the ByPass Return Run.

If the bypass is used, it would be sized to handle the excess pressure build up under the worst case scenario rule. The reason we use the worst case scenario is that this is the worst possible condition of airflow. This condition will cause the most excess pressure build up that is possible. The calculation is done by taking the total CFM capacity of the smallest zone, let's say 600 CFM, and subtract that from the total CFM of the system, let's say 2000 CFM.

Total system CFM	2000
<u>Less smallest zone's CFM</u>	<u>-600</u>
Bypass amount CFM	1400

The bypass duct would be sized to handle the 1400 CFM which would be the excess pressure when only that one zone calls. The excess air can also be routed through the bypass damper and "dumped" into an area that has access to an open return. This method will not provide the efficiency of the By-Pass Method. For by-pass damper CFM capacities, see the chart below. The dump-zone method, which should only be used when it is not possible to install a connection between the supply and return, will provide some of the same benefits as the by-pass method. This method will still use a bypass damper, but it will not go through the return duct. The dump zone will take the excess pressure build-up and dump it

into a non-critical area of the home. Non-critical can be interpreted many ways, what EWC Controls has seen most commonly used are basements, entrance foyers, work shops or mechanical rooms. These areas are considered non-critical because they are non-living areas where temperature control is not as important. This method should be used responsibly by the installer. Determining what is a non-critical area is not to be taken lightly, this should be a thought-out process keeping the homeowners needs and expectations in mind.

Using some method of bypass is the most effective way to zone a home or building. Bypassing will accommodate the homeowners or occupants demand for a controlled environment. Some zoning systems call for bypassing the air into a zoned area, this however will NOT allow for maximum comfort. This method allows the bypassed air to over shoot the thermostats temperature set point. What this type of system does is leave the zone dampers partially open when they should be fully closed, allowing for the bypass air to flow into an already satisfied zone. This will negate the effect of zoning and drastically reduce the comfort level, and savings potential of the home. Zoning is the control of the airflow from the HVAC equipment that allows for Individual Room Temperature Control. With proper installation there is no reason why an individual room cannot maintain a one degree differential from set point.

Duct design will be uniquely different from one zoning job to another and because of that, unfortunately there is no single way of laying out a zoning system. What EWC Controls has tried to do is to give you the critical information that is needed before a zoning system can be installed. We have also tried to show a few common techniques that are being used by others who are installing EWC Controls zoning systems. These are just a few suggestions, other methods and techniques can be used if they are more successful for your applications. EWC Controls always recommends following ACCA Manual Zr specifications.

Bypass Damper CFM Capacity

Rectangular	By-Pass CFM	Round	By-Pass CFM
12"x8"	1000	8"	400
12"x10"	1200	10"	700
12"x12"	1400	12"	1100
20"x8"	1600	14"	1700
20"x10"	2000	16"	2200
20"x12"	3000		

* @1400 fpm or .3" w.c.

As a barometer use 1400 fpm to achieve smaller by-pass runs at higher velocities.

(See Pages 15 & 16)



SAS Included



EWC Controls has built a truly innovative, plug-n-play 4 wire communicating zone system for any application. The UT-3000's design allows the zoning system to "Talk" to the equipment and thermostats to reduce labor time and optimize performance. This "Talk" feature allows the system to auto-configure itself without installer programming or setting dip switches.

The highly advanced UT-3000 is compatible with all communicating HVAC systems that are built on the ClimateTalk™ open protocol. The UT-3000 is a 3 zone system that is expandable up to 5 zones.

The UT-3000 produces a true proportional signal to control BTU capacity during operation. The output signal for the system is based on how many zones are calling and the temperature of the supply air. Based on these readings this unique feature will allow an ECM motor operating on the ClimateTalk™ protocol to function at it's lowest possible Cfm output, reducing the need for a by-pass damper to control static pressure. Any multi-stage or modulating hi-efficiency HVAC system that functions in ClimateTalk™ mode, will be operated in a manner that maximizes temperature control and minimizes blower speed and reduces by-pass function.


By monitoring the Supply Air temperature the UT-3000 will stage the HVAC equipment to optimize the comfort level while reducing energy consumption. Based on the demand for heating or cooling, i.e. how many zones are calling, how far out of range the supply air is from set point and the type of thermostats installed, the UT-3000 will produce the required amount of supply air to satisfy the demand. The flexibility of the UT-3000 allows the installer to change that demand level based on the customers expectations of the staging function

The Supply Air Sensor feature is a constant monitoring device that sends vital data back to the UT-3000 in order for the system to function efficiently. Adjustable target set-points on the supply air sensor allow staging to occur in shorter or longer increments, as well as, allow system capacity to increase or decrease based on the target set-points. The adjustable set points allow for greater flexibility for all operating conditions giving the installer the ability to maximize energy savings and comfort.

MODEL UZC-4

(up to 4 heat & 2 cool)

SAS Included

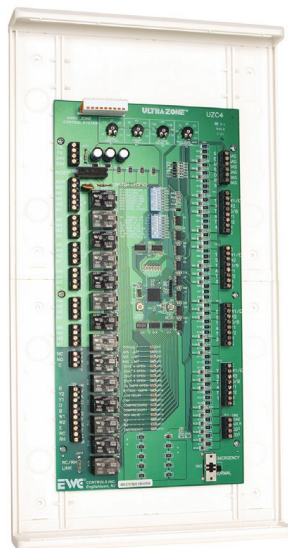

MODEL UZC (Revision 4)

The Ultra-Zone Model UZC is a 4 zone control panel that features auto changeover between heating and cooling modes. The UZC will accept the first call of heating or cooling and turn the system on and close the dampers to the non-calling zones. If another zone calls for the opposite mode, the UZC will hold that call until the first call is satisfied or until a 20 minute timer has passed. Once accomplished, the UZC will go through a time delay to purge the conditioned air out of the system.

The purge time is the total time the fan will remain on with the last calling dampers remaining open. This can be either 1-1/2 or 3 minutes. The automatic changeover time is fixed at 4 minutes including the purge time. At the end of this time the system will activate the opposite mode of the HVAC system.


The UZC will control Single Stage 2, 3, & 4 Stage conventional, geothermal or Dual Fuel heat pumps, without the need for dual fuel kits. Also single or multi-stage gas, oil, & hydronic HVAC systems with either single or two stage cooling and constant or variable speed fan systems. Any and all of these systems can be controlled with most any off the shelf thermostats.

The UZC allows for the use of any type of thermostat on any zone with any type of HVAC equipment. This is done with a staging timer built into the UZC. A field adjustable timer between 7 – 42 minutes will energize the staging up when necessary if zones are not satisfying based upon the time set on the timer. This feature allows the installer to use single stage thermostats with multi-stage equipment, a very user friendly feature.

There are (2) two energy saving features that the UZC incorporates that can save homeowners more than 40% on utility bills. The first is our 50% rule. This feature will not allow staging up to occur if less than 50% of the zones are in demand. This will prevent the HVAC system from consuming unneeded energy. The second is using our OAS sensor with the UZC to sense the outside air temperature and also limit the staging up process if the temperature is too mild. The OAS works with an adjustable setting between 7 and 42 degrees, if the temperature is above the set point, again the UZC will prevent the use of unneeded energy consumption.

MODEL ZXM-2

(Expansion Panel)
(maximum 22 zones)



The UZC also features (2) two safety controls built into the panel. The first is its ability to have a “Fire Alarm Interlock”. If the UZC is wired into the fire alarm system and a signal is detected the UZC will shutdown the HVAC system and close all dampers. The second safety feature is “Demand Based Ventilation”. This allows the UZC to wire into a CO₂ monitor and control Fresh Air if needed. If the UZC detects a signal from the Carbon Dioxide monitor the panel will open all dampers, open the Fresh Air damper and turn the HVAC fan on, helping to vent the building.

Other Industry setting features include:

Electronic Bypass Damper Interface

Achieves “Latent Cooling” and “Quiet Mode” start up

Adjustable Supply Air Sensor

Prevents over heating or cooling

Adjustable Heat Differential Potentiometer

Allows the SAS to be mounted in any location

One Zone Feature

Allows one thermostat to control multiple zones for set back

Computer Watchdog Circuitry

Prevents lock-ups from power failures and power interruptions.

Manual and Automatic Thermal Circuit Breakers

Protects the UZC from wiring shorts

Dehumidify or Humidify Interface

Auxiliary contacts to help increase comfort operations

Return Air Monitoring

Enhanced HVAC energy savings

Variable Speed Interface

Slows down fan speed if less than 25% of zones are calling

For systems larger than 16 zones, call factory for pricing.

Product	Product
UZC-4	UZC-14
UZC-6	UZC-16
UZC-8	SAS
UZC-10	OAS
UZC-12	ZXM-2
	OAS-GT*

*Geothermal Applications

Zone Control Systems

BMPlus Series (up to 3 heat & 2 cool)



The BMPlus-3z Zone Control System delivers advanced HVAC zoning performance in a streamlined, installer-friendly package. Designed with contractors in mind, it brings together compatibility, flexibility, and reliability to meet the demands of today's diverse residential and light commercial projects. Out of the box, the BMPlus-3z controls two or three zones, and can easily expand to six or nine zones using XM-3z expansion panels, perfect for both retrofit and new construction applications.

- Controls 2–3 zones, expandable to 6 or 9 with XM-3z expansion panel.
- Large LCD display with simple 4-button navigation and real-time system status.
- Universal thermostat compatibility, including most WiFi models.
- Works with single or multi-stage gas, oil, electric, hydronic, heat pump, and dual-fuel systems.
- Integrated safety interlock for A2L refrigerant leak sensors, wet switches, and smoke detectors.
- Multiple staging options: Stage by Weight, 50% Rule, or Time-Based.
- Fresh Air control option with adjustable outdoor air temperature limits.
- Fully compatible with EWC motorized dampers, DAPC static pressure control, and Smart Bypass Dampers

SAS Included



Model	Model
BMPlus-3z	XM-3z
BMPlus-6z	SAS
BMPlus-9z	OAS

XM-3z (Expansion Panel) (maximum 9 zones)

The XM-3z is the expansion panel for the BMPlus series control panel. The XM-3z will allow the original (3) three zone panel to expand (3) three zones at a time. The XM-3z comes with a “plug-n-play” cable that will connect to the main panel.

Model
XM-3z

OAS



Accessories

Model
OAS

NCM-3z

The NCM-3z works with single stage and heat pump systems. Multiple configurations of Single Stage systems, 2 heat / 1 cool systems and 2 heat / 1 cool Heat pump systems are all compatible with heat/cool single stage thermostats and 2 heat / 1 cool Heat pump, as well as any Smart Wifi thermostats.

The four-button menu control is provided for easy set up while scrolling through the LCD Display screen. The LCD display will provide real-time “system status” feedback, such as Supply Air Temperature, System Mode of Operation, Fresh Air Cycles remaining and Status of the on-board safety interlock features. Fresh Air option allows the NCM-3z to operate as a 2-zone system with the (3rd) third zone acting as a Fresh Air intake. The NCM-3z will calculate the amount of fresh air allowed based on “Minutes of Fresh Air per Hour” along with the Square Footage of the home, the number of occupants in the home and the size of the intake duct installed.

The NCM-3z Safety Circuit allows the installer to connect safety devices directly to the zone panel. This feature was designed with the new A2L refrigerants in mind, though this feature also works with wet switches, condensate pumps, smoke detectors, and fire alarms. If the safety device contacts open, the NCM-3z will shut down the heating or cooling demand and either turn the Indoor Fan “On” and open all dampers or turn the Indoor Fan “Off” and close all dampers.

SAS Included



Model
NCM-3z
NCM-3zL

MODEL URD



MODEL RSD



URD and RSD Models

Size	Size
4 URD	12 URD
6 URD	14 URD
7 URD	16 URD
8 URD	18 URD
9 URD	20 URD
10 URD	Spring Return
	18 URD-TF24
	20 URD-TF24

Model URD & RSD Round Dampers

Model URD and RSD are round, single blade dampers with a shutoff seal that gives the damper a 98% closure. The motor for the URD has no moving switches or parts to burn out. The actuator possesses 18 in lbs of torque, manual gear release and powered open/powered close operations. The URD features “fail safe” LED’s that will indicate the position of the blade without the need to cut holes or remove the damper from the ductwork. The positional LED’s will only illuminate when the blade is in the full open or full closed position.

The RSD is a spring return motor. The damper is field reversible from power closed/spring open to power open/spring closed. The motor possesses 3" lbs of torque. The 18" and 20" RSD’s have a motor with 18" lbs of torque. The RSD has NO LEDS.

Options:

URD-SRE	24V Spring Return w/end switch
URD-SRE120	120V Spring Return w/end switch
URD-TF24	24V – 18 in LBS -Spring Return
URD-TF120	120 V - 18 in LBS -Spring Return
URD-LF24	24V – 35 in LBS -Spring Return
URD-LF120	120V – 35 in LBS -Spring Return
URD-LM24SR-T	Modulating Motor
URD-LM24	45 in LBS Motor 24 Volt
URD-L	5/8" round shaft-no motor

MODEL SID



The Retrofit Solution

The SID (Slip-In-Damper) is the most user friendly retrofit damper available. The 2.5 VA actuator allows up to 15 SID’s on one EWC Controls zone panel with a 40va transformer. With a single cut the SID can be installed in seconds. Optional 15 second motor (model SID-15s) is also available.

Model
4 SID
5 SID
6 SID
7 SID
8 SID
9 SID
10 SID

Motorized Dampers

Old Fashion Reliability With NEW State of the Art Technology

- Heavy Duty Frame
- Nylon Bushings for Quieter Operation
- Revolutionary Motor with greater Reliability
- LED's to Show Damper Operation
- Low Leakage
- Simple 3-wire Hook-up
- Motor is always mounted on second dimension specified

Options

ND-SRE	24V Spring Return w/end switch
ND-SRE120	120V Spring Return w/end switch
ND-TF24	24V – 18 in LBS -Spring Return
ND-TF120	120 V - 18 in LBS -Spring Return
ND-LF24	24V – 35 in LBS -Spring Return
ND-LF120	120V – 35 in LBS -Spring Return
ND-LM24SR-T	Modulating Motor
ND-LM24	45 in LBS Motor 24 Volt
ND-L	5/8" round shaft-no motor

MODEL ND



MODEL ND-RSD



ND SERIES DAMPERS

The ND series of Ultra-Zone dampers was designed with the installer and homeowners in mind. This damper is easy to install and easy to checkout. The LED display allows the installer to visually check the damper operation. With a sturdier frame, the damper installs in the duct much faster and easier and the nylon bushings ensure quieter operation. This is a feature that homeowners will never hear about! Quieter operation and a longer life motor equals NO call backs.

The motor for the ND damper is driven by 18" lbs. of torque, possesses a manual gear release, 3 wire power open/power closed operation and fail-safe LED's for quick diagnostic checks. The motor is UL listed and NEMA Class 2 certified. The easy access, quick connecting terminal block eliminates the need for wire nuts and allows for trouble free use.

The ND damper has a 97% leak proof rating. Overlapping blades and a strong positive shut-off motor ensures accurate control of all zones. The ND dampers combined with an Ultra-Zone zoning system provides the most comfortable and reliable system in the industry.


The ND is available in 8" x 6" thru 30" x 30" in even inch increments. The motor will be mounted on the second dimension when ordered. For example, a 16" x 8" damper will have the motor mounted on the 8" dimension, while an 8" x 16" will have the motor mounted on the 16" dimension. This will alleviate the confusion between side mount and bottom mount dampers.

For added flexibility, ND dampers can also be provided with a spring return style motor. (Model ND-RSD). The ND-RSD is driven by 3" lbs. of torque without LEDs.

Note: Specify "spring closed" or "spring open" when ordering

Duct Board Adapters

The brackets are used to mount ND and ND-RSD style dampers to fiberglass duct boards. The brackets are 1" thick. Add the number "5" to the part number for 1.5" thick duct board. (Ex. DBA-10-5)

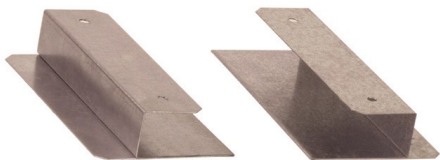

Model	Model
DBA-6	DBA-16
DBA-8	DBA-18
DBA-10	DBA-20
DBA-12	DBA-22
DBA-14	DBA-24

ND & ND-RSD* Models

Side Mounts

8X6 ND	26X8 ND
8X8 ND	26X10 ND
10X6 ND	26X12 ND
10X8 ND	26X14 ND
10X10 ND	26X16 ND
12X6 ND	26X18 ND
12X8 ND	26X20 ND
12X10 ND	26X22 ND
12X12 ND	26X24 ND
14X6 ND	26X26 ND
14X8 ND	28X6 ND
14X10 ND	28X8 ND
14X12 ND	28X10 ND
14X14 ND	28X12 ND
16X6 ND	28X14 ND
16X8 ND	28X16 ND
16X10 ND	28X18 ND
16X12 ND	28X20 ND
16X14 ND	28X22 ND
16X16 ND	28X24 ND
18X6 ND	28X26 ND
18X8 ND	28X28 ND
18X10 ND	30X6 ND
18X12 ND	30X8 ND
18X14 ND	30X10 ND
18X16 ND	30X12 ND
18X18 ND	30X14 ND
20X6 ND	30X16 ND
20X8 ND	30X18 ND
20X10 ND	30X20 ND
20X12 ND	30X22 ND
20X14 ND	30X24 ND
20X16 ND	30X26 ND
20X18 ND	30X28 ND
20X20 ND	30X30 ND
22X6 ND	
22X8 ND	
22X10 ND	
22X12 ND	
22X14 ND	
22X16 ND	
22X18 ND	
22X20 ND	
22X22 ND	
24X6 ND	
24X8 ND	
24X10 ND	
24X12 ND	
24X14 ND	
24X16 ND	
24X18 ND	
24X20 ND	
24X22 ND	
24X24 ND	
26X6 ND	

Bottom Mounts

8X10 ND
8X12 ND
8X14 ND
8X16 ND
8X18 ND
8X20 ND
8X22 ND
8X24 ND
8X26 ND
8X28 ND
8X30 ND
10X12 ND
10X14 ND
10X16 ND
10X18 ND
10X20 ND
10X22 ND
10X24 ND
10X26 ND
10X28 ND
10X30 ND
12X14 ND
12X16 ND
12X18 ND
12X20 ND
12X22 ND
12X24 ND
12X26 ND
12X28 ND
12X30 ND
14X16 ND
14X18 ND
14X20 ND
14X22 ND
14X24 ND
14X26 ND
14X28 ND
14X30 ND
16X18 ND
16X20 ND
16X22 ND
16X24 ND
16X26 ND
16X28 ND
16X30 ND
18X20 ND
18X22 ND
18X24 ND
18X26 ND
20X22 ND
20X24 ND

Note - Motor is always mounted on second dimension specified.

Note - If the First dimension is larger than the second dimension the damper is considered a Side Mount Damper.

If the Second dimension is larger than the first dimension the damper is considered a Bottom Mount Damper.

*** Due to size constraints a stronger torque motor may be required for larger ND-RSD dampers, call for pricing.**

*Custom sizes in 1" increments are available, please call factory.

15 Second Motorized Dampers

MODEL URD-15S

Size	Size
5 URD-15S	12 URD-15S
6 URD-15S	14 URD-15S
7 URD-15S	16 URD-15S
8 URD-15S	18 URD-15S
9 URD-15S	20 URD-15S
10 URD-15S	

MODEL SID-15S

Model
4 SID-15s
5 SID-15s
6 SID-15s
7 SID-15s
8 SID-15s
9 SID-15s
10 SID-15s

Bottom Mount

8X10 ND-15S
8X12 ND-15S
8X14 ND-15S
8X16 ND-15S
8X18 ND-15S
8X20 ND-15S
8X22 ND-15S
8X24 ND-15S
8X26 ND-15S
8X28 ND-15S
8X30 ND-15S
10X12 ND-15S
10X14 ND-15S
10X16 ND-15S
10X18 ND-15S
10X20 ND-15S
10X22 ND-15S
10X24 ND-15S
10X26 ND-15S
10X28 ND-15S
10X30 ND-15S
12X14 ND-15S
12X16 ND-15S
12X18 ND-15S
12X20 ND-15S
12X22 ND-15S
12X24 ND-15S
12X26 ND-15S
12X28 ND-15S
12X30 ND-15S
14X16 ND-15S
14X18 ND-15S
14X20 ND-15S
14X22 ND-15S
14X24 ND-15S
14X26 ND-15S
14X28 ND-15S
14X30 ND-15S
16X18 ND-15S
16X20 ND-15S
16X22 ND-15S
16X24 ND-15S
16X26 ND-15S
16X28 ND-15S
16X30 ND-15S
18X20 ND-15S
18X22 ND-15S
18X24 ND-15S
18X26 ND-15S
20X22 ND-15S
20X24 ND-15S

Side Mounts

8X6 ND-15S	24X8 ND-15S
8X8 ND-15S	24X10 ND-15S
10X6 ND-15S	24X12 ND-15S
10X8 ND-15S	24X14 ND-15S
10X10 ND-15S	24X16 ND-15S
12X6 ND-15S	24X18 ND-15S
12X8 ND-15S	24X20 ND-15S
12X10 ND-15S	24X22 ND-15S
12X12 ND-15S	24X24 ND-15S
14X6 ND-15S	26X6 ND-15S
14X8 ND-15S	26X8 ND-15S
14X10 ND-15S	26X10 ND-15S
14X12 ND-15S	26X12 ND-15S
14X14 ND-15S	26X14 ND-15S
16X6 ND-15S	26X16 ND-15S
16X8 ND-15S	26X18 ND-15S
16X10 ND-15S	26X20 ND-15S
16X12 ND-15S	26X22 ND-15S
16X14 ND-15S	26X24 ND-15S
16X16 ND-15S	26X26 ND-15S
18X6 ND-15S	28X6 ND-15S
18X8 ND-15S	28X8 ND-15S
18X10 ND-15S	28X10 ND-15S
18X12 ND-15S	28X12 ND-15S
18X14 ND-15S	28X14 ND-15S
18X16 ND-15S	28X16 ND-15S
18X18 ND-15S	28X18 ND-15S
20X6 ND-15S	28X20 ND-15S
20X8 ND-15S	28X22 ND-15S
20X10 ND-15S	28X24 ND-15S
20X12 ND-15S	28X26 ND-15S
20X14 ND-15S	28X28 ND-15S
20X16 ND-15S	30X6 ND-15S
20X18 ND-15S	30X8 ND-15S
20X20 ND-15S	30X10 ND-15S
22X6 ND-15S	30X12 ND-15S
22X8 ND-15S	30X14 ND-15S
22X10 ND-15S	30X16 ND-15S
22X12 ND-15S	30X18 ND-15S
22X14 ND-15S	30X20 ND-15S
22X16 ND-15S	30X22 ND-15S
22X18 ND-15S	30X24 ND-15S
22X20 ND-15S	30X26 ND-15S
22X22 ND-15S	30X28 ND-15S
24X6 ND-15S	30X30 ND-15S

Note: Motor is always mounted on second dimension specified.

*Custom sizes in 1" increments are available, please call factory.

Static Pressure Control

The Smart By-Pass Damper automatically measures, monitors and maintains the designed operating static pressure of all HVAC systems in all modes of operation. The SBD will capture the total static pressure of the system during non-zoned mode, and modulate to maintain that static pressure during zoned mode. As zone dampers open and close the static pressure will fluctuate in the HVAC system. The SBD is designed to sense that static pressure fluctuation and will modulate to maintain the proper operating static pressure during zoning modes.

With our New NFC (Near Field Communication) function, using your Android Smartphone will allow you to access the SBD and adjust the Static Pressure, if needed, or allow you to view the static pressure value, system static setpoints, the SBD damper position, hours of operation and indoor fan activity. Our **ZIP-BTNFC** adaptor will allow the use of any iOS Smartphone device to have the same access.



ZIP-BTNFC

SBD



Size
8 SBD
10 SBD
12 SBD
14 SBD
16 SBD
18 SBD
20 SBD
ZIP-BT-NFC

SBD




Size
12X8 SBD
12X10 SBD
12X12 SBD
20X8 SBD
20X10 SBD
20X12 SBD

NOTE – We will make any size SBD. Use with ND or URD style damper. (See Page 11 & 13)
Add'l charge to ND applies.

The CLBD – Constant Load By-Pass Damper is a revolutionary design that eliminates the guess work of setting a manual by-pass damper. The CLBD will allow the installer to set the desired static pressure of the damper with the simple turn of a knob. The damper is adjustable from 3" WC up to 8" WC. By turning the knob you can adjust the static pressure. The static pressure indicator window will show the installer what static the damper is adjusted to. During operation, a blade indicator viewing window will show the installer the blade position of the CLBD. The by-pass damper can be installed in any angle and any position which makes it a labor saving, simple design.

MODEL CLBD

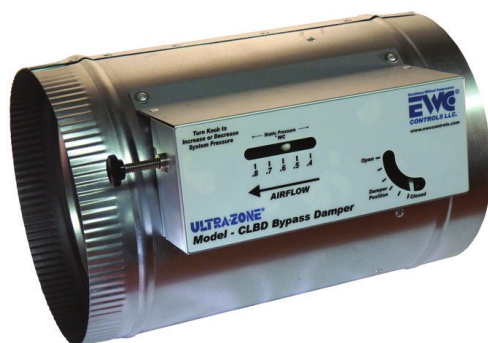

Size
8 CLBD
10 CLBD
12 CLBD
14 CLBD
16 CLBD

DISTRIBUTED AIR PRESSURE CONTROLLER

The DAPC is a great solution for jobs that have no room to install a by-pass or an application where you can't use a by-pass damper. The DAPC will monitor your HVAC system static pressure and the zone damper "open" and "close" commands from the EWC Controls zone panel. When the static is too high, the DAPC will modulate any non-calling "closed" zone dampers in order to control the static pressure. The DAPC can be customized to select any desired static pressure and can pick which zone damper(s) to open when needed. The DAPC is ready to use "out-of-the-box" and can automatically discover the system's static pressure. The balancing of static pressure into non-calling zones, or through the system is adjustable for installer convenience.



MODEL DAPC

Model
DAPC





To download our App with the By-pass Calculator scan the QR Code



MODEL EBD

*Meets ACCA Manual Zr specifications.

MODEL PS-4

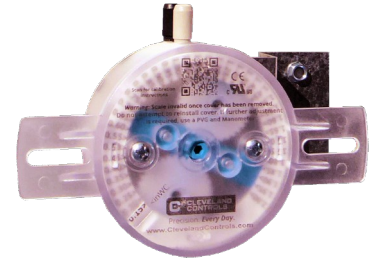

The EBD style by-pass are self-contained units that give you the static control mounted to the damper. It is an “all-in-one” design that makes the installation process much easier than most electronic by-pass dampers. The static pressure can be adjusted in the field between 0.1" to 4" of pressure. This is done by the turn of a set-screw. Requires 24VAC to operate. Tubing and pitot tube are included.

Size
8 EBD
10 EBD
12 EBD
14 EBD
16 EBD
18 EBD
20 EBD

Size
12X8 EBD
12X10 EBD
12X12 EBD
20X8 EBD
20X10 EBD
20X12 EBD

To order Pressure Switch **ONLY**

Model PS4
PS-4 Parts Bag

NOTE: We can make any size EBD. Use with ND or URD style damper. (See Pages 11 & 13)


Model PRD pressure regulating damper is a single blade, barometric damper with a counter balanced weighted arm. The damper provides an economical solution for bypassing excess air when zone dampers close. Damper adjustment is done by adjusting the supplied weights and offsetting the arm. The dampers are reversible for Airflow Direction.

Other sizes available upon request.

Additional Arms and Weights

Part Name: PRD Weight and Arm

MODEL PRD



Rectangular	By-Pass CFM
12X8 PRD	1000
12X10 PRD	1200
12X12 PRD	1400
20X8 PRD	1600
20X10 PRD	2000
20X12 PRD	3000

@1400 fpm
Or .3" w.c.

As a barometer use 1400 Fpm to achieve smaller by-pass runs at higher velocities.

Restricting Hand Dampers & EWC Econet-3

RESTRICTING HAND DAMPERS

The hand damper is used to restrict airflow through the by-pass trunk during by-pass operation. These were designed to meet ACCA Manual Zr specification performance ratings and California Title 24 requirements.

(Available in all ND sizes See Page 13)

Call for pricing.

RD-HD




Size
8 RD-HD
10 RD-HD
12 RD-HD
14 RD-HD
16 RD-HD
18 RD-HD

ND-HD



Size
12X8 ND-HD
12X10 ND-HD
12X12 ND-HD
20X8 ND-HD
20X10 ND-HD
20X12 ND-HD

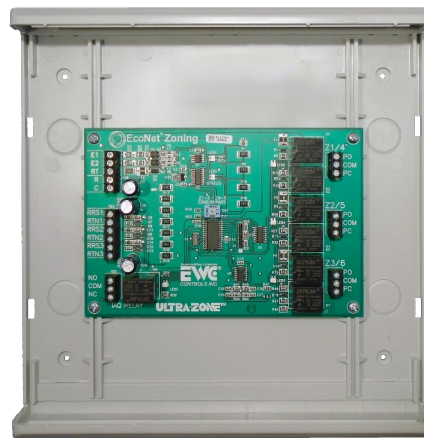

The EWC Econet-3 is a communicating 3-zone control panel designed for seamless integration with Rheem® and Ruud® EcoNet® enabled HVAC systems. Engineered and manufactured by EWC Controls, the Econet-3 delivers reliable multi-zone comfort management while maintaining full communication between the indoor unit, outdoor unit, and EcoNet thermostats.

Designed for residential forced-air zoning applications, the Econet-3 supports up to three zones per panel and can be twinned with additional panels to accommodate larger zoning applications requiring additional zones. Utilizing EWC's proven zoning expertise, the system provides improved comfort, airflow management, and optimized equipment performance for both communicating inverter and conventional HVAC systems.

Features include:

- Native compatibility with Rheem/Ruud EcoNet communicating systems
- Supports up to 3 zones per panel
- Expandable through panel twinning for additional zones
- Integrated equipment and zone communication management
- Designed for use with EWC 35-second 3-wire dampers
- Simplified installation and setup
- LED system status and diagnostic indicators
- Compact, installer-friendly design



MA-SBD

Replacement motor for SBD by-pass dampers.

MA-SRE



24V and 120V available.

Two wire spring return actuator. Used on SMD-SR, RD-SR, URD-SR & ND-SRE dampers.

MA-15S




Replacement motor for ND, URD, or SID style dampers with a 15 second rotation. 3 wire power-open / power-closed.

RAS



Return air sensor used to monitor temperature of the return duct.

CPLS



Monitors cooling coil temperature and protects against coil freeze-up. Stops compressor below 37° and restarts above 47°. (Not adjustable) Mounts on a 3/4" suction line.

MRK



Motor replacement kit used for all styles of ND - URD and RDN dampers.

MA-RSD



Replacement motor for ND-RSD and RSD style dampers.

SAS



Supply air sensor used to monitor temperature of the supply air.

OAS



Outdoor air sensor used to monitor temperature of the outside air.

Alphabetical Product List

Item	Page #
BMPlus-3z	Page 10
CLBD	Page 15
CPLS	Page 18
DAPC	Page 15
DBA	Page 12
EBD	Page 16
MA-15S	Page 18
MA-RSD	Page 18
MA-SBD	Page 18
MA-SRE	Page 18
MRK	Page 18
NCM-3z	Page 10
ND	Page 12
ND-HD	Page 17
ND-L	Page 12
ND-LF120	Page 12
ND-LF24	Page 12
ND-LM24	Page 12
ND-LM24SR-T	Page 12
ND-15S	Page 14
ND-RSD	Page 12
ND-SRE	Page 12
ND-SRE120	Page 12
ND-TF120	Page 12
ND-TF24	Page 12
OAS	Page 18
OAS-GT	Page 9
PRD	Page 16
PRD-Weight and Arm	Page 16
PS-4	Page 16

Item	Page #
RAS	Page 18
RD-HD	Page 17
RSD	Page 11
SAS	Page 18
SBD	Page 15
SID	Page 11
SID-15S	Page 14
URD	Page 11
URD-15S	Page 14
UT-3000	Page 8
UZZ	Page 9
XM-3z	Page 10
ZIP-BT-NFC	Page 15
ZXM-2	Page 9

LIMITED WARRANTY

EWC Controls warrants its products to be free of any defect in material and workmanship for a period of five years from date of installation. All returns are subject to a restocking charge and MUST have prior authorization from EWC Controls to be returned. SPECIAL ORDER AND NON-STANDARD ITEMS ARE NOT RETURNABLE.

EWC Controls will inspect all returned items. If found to be defective in material or workmanship, the item will be replaced or credited per customer request. All items must be sent freight pre-paid.

Any item found not to be defective or out of warranty will be returned freight-collect.


EWC Controls will not be liable for any special, indirect, incidental, or consequential damages, including but not limited to, labor charges of any character in connection with the sale, resale or use of the item.

EWC Controls reserves the right to make changes without notice in design, application, and price in order to effect product improvement.

Scan for pricing



Scan for app



DISTRIBUTED BY:

Excellence Without Compromise
EWC
CONTROLS, LLC.

385 HWY . 33 ENGLISHTOWN, NJ 07726

Phone: 800-446-3110 Fax: 732-446-5362

www.ewccontrols.com

